

TECHNICAL DATA SHEET


DSD PLUS

Ref.

5152111

Description

Self-braking descender with double locking positions. The longer rubber coated handle, curvy side plates allow a comfortable and reliable grip. The possibility of incorrect insertion of the rope is small and it will not result in a fall. A wear indicator was integrated into the pivoting pulley. The descending speed can be controlled at 2 m/s. Ideal for single and assisted descents, intervention techniques, evacuations, rescue, plain rope access as well as sport use.

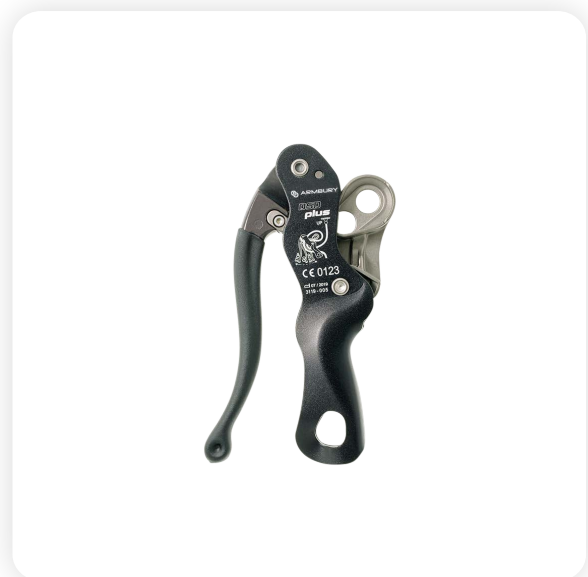

Technical specification

EN12841-C: max. load 130 kg with static rope 9-10 mm, max. load 200 kg with static rope 10-12 mm
EN 341-A: load range 30-160 kg (max. descent distance 190 m), with static rope 11 mm
Weight: 430 g
Material: Stainless Steel / Aluminium
CE-EN12841-EN341

References

WARNING: Before use, read and understand all instructions. Understand and accept the risks involved before participating. Any misuse of the equipment can result in severe injury or death. Products and specifications subject to change without notice.