

TECHNICAL DATA SHEET


LORY SMART

Ref.

5152211

Description

Robust multi purpose device for use in industrial access and sport climbing applications. Its functionality spans the range from rope access and rescue descender device through semi-automatic belay device.

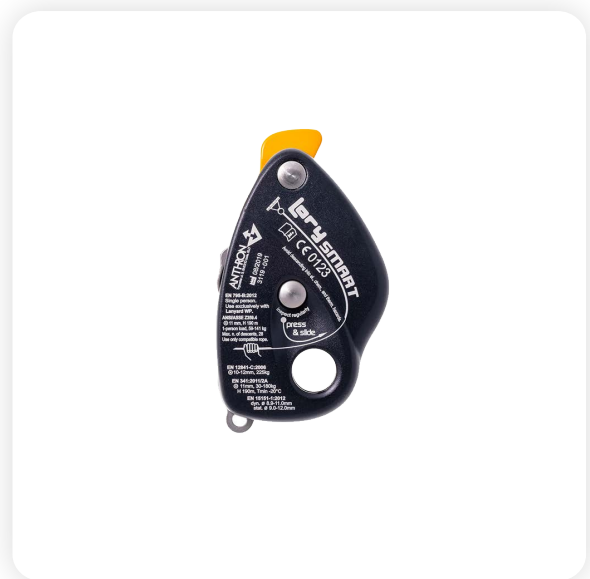

Technical specification

EN12841-C: max. load 225 kg with static rope 10-12 mm

EN 341-A: load range 30-180 kg (max. descent distance 190 m), with static rope 11 mm

EN 795-B: for one person

Weight: 365 g

Material: Stainless Steel / Aluminium

CE-EN12841-EN341-EN15151-EN795

References

WARNING: Before use, read and understand all instructions. Understand and accept the risks involving before participating. Any misuse of the equipment can result in severe injury or death. Products and specifications subject to change without notice.
