

TECHNICAL DATA SHEET


MAX Y

Ref.

51322X3

Description

Double lanyards constructed from 10.5mm polyamide static rope with a compact energy absorber designed for protection on metal structures.

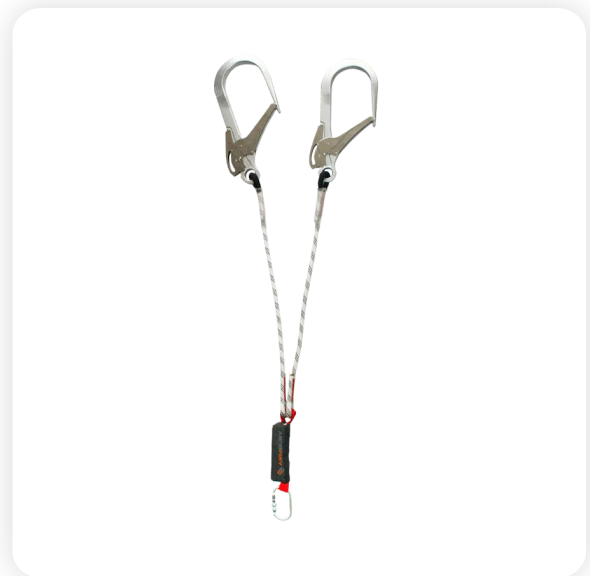

Technical specification

Connector: O steel SC - 2 x H 60
Length: 100 cm / 150 cm / 200 cm
Min.BL: 22 kN
Weight: 1025 g / 1110 g / 1195 g
Connector Material: Steel / Aluminium
Rope Material: Polyamide
CE-EN355

References

CODE	LENGTH
5132213	100 CM
5132223	150 CM
5132243	200 CM

WARNING: Before use, read and understand all instructions.
Understand and accept the risks involving before participating.
Any misuse of the equipment can result in severe injury or death.
Products and specifications subject to change without notice.
